

Rec'd PCTATTO 15 DEC 2004

10/18022/18,022

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
24 December 2003 (24.12.2003)

PCT

(10) International Publication Number  
**WO 03/107721 A1**

(51) International Patent Classification<sup>7</sup>: **H05B 3/34**

(21) International Application Number: PCT/IL03/00520

(22) International Filing Date: 18 June 2003 (18.06.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data: **18 Dec 04**  
10/174,528 18 June 2002 (18.06.2002) US  
153871 9 January 2003 (09.01.2003) IL

(71) Applicant (for all designated States except US):  
**HTTP-HYPOTHERMIA THERAPY LTD.** [IL/IL];  
11 Even Shmuel, 97234 Jerusalem (IL).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **BIKHOVSKY, David** [IL/IL]; 19 Hamata Street, D.N. East Benjamin, 90627 Ofra (IL). **BAR-ADON, Dorith** [IL/IL]; 11 Ivn Shmuel Street, Ramot B, 97234 Jerusalem (IL).

(74) Agent: **REINHOLD COHN AND PARTNERS**; P.O.Box 4060, 61040 Tel Aviv (IL).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Published:**

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: ELECTRICAL HEATING DEVICE, PARTICULARLY FOR HEATING A PATIENT BODY

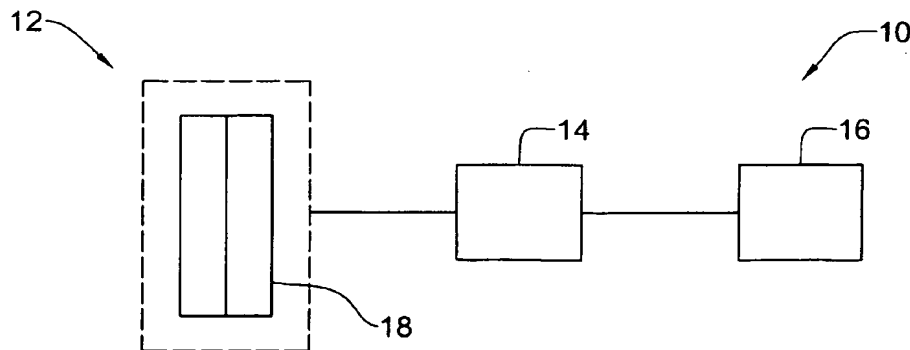

(57) Abstract: An electrical heating unit is presented for use in a heating device for heating an object to a required temperature and enabling maintaining this temperature of the object. The heating unit may have the following configuration: first and second elements each made of a material with a specific resistivity in a range of about 0.01-0.1 Ohm×mm<sup>2</sup>/m thereby enabling substantial flatness and flexibility of the heating unit, the first and second elements being accommodated adjacent to each other in spaced-apart substantially parallel planes, being electrically insulated from each other, and having different resistance and different surface areas as compared to each other, the first element having the relatively high resistance and relatively low surface area and serving as a heater, and the second element, which is to be located closer to the object when in operation of the heating unit, serving as a distributor of heat created by the first element when the first element is connected to a power source, the heating unit being arranged so as to provide for compensating a magnetic field created by the heating unit when connected to the power source. The heating unit may have the following configuration: comprises a heater element made of an electrically conductive material and formed with spaced-apart holes of predetermined shape and distribution within the heater element plane so as to provide a desired value of a working resistance of the heater element for generating a required heat power, the heating unit when connected to the power source thereby providing substantially homogeneous temperature field in the vicinity of the heating unit.

WO 03/107721 A1

## **ELECTRICAL HEATING DEVICE PARTICULARLY FOR HEATING A PATIENT BODY**

### **FIELD OF THE INVENTION**

The present invention is generally in the field of electrical heating techniques, and relates to an electrical heating unit and a heating device and system utilizing the same. The present invention is particularly useful for heating a body,  
5 for example, in medical applications for heating a patient's body.

### **BACKGROUND OF THE INVENTION**

Various medical applications, for example during a surgical procedure and within a certain time period thereafter, a patient's body requires to be externally heated, and preferably also uniformly heated. Heat transfer devices for transferring  
10 heat to the patient's body, which are used at present in operating rooms, are generally of two types: the first type utilizes a closed circuit with heated water circulating thereinside, and the second utilizes an open circuit, wherein heated air blows around the patient's body.

The heating technique of the first kind involves covering a patient with a  
15 thin rubber cover with warm water circulating through the cover. A device, equipped with a heat exchanger and pump, warms and circulates the water. Some of these devices also have the capability of regulating the temperature of the water based on core temperature measurement. These systems, however, give off heat to the environment and cause discomfort to the medical team. Moreover, these  
20 systems suffer from the following drawbacks: the very high cost of warming units, occasional leaking as the result of cutting the unit, blocking of the system when a patient is too heavy, and the system being bulky and heavy (containing about 3.5-5 liters of water).

- 2 -

As for the technique of the second type, it utilizes force air warming. These systems can be mostly preset at one of three thermal levels up to 43°C. They have different configurations to fit the upper body, lower body, torso, and full body, as well as pediatric blankets. The warm air in the system escapes through the pores on the upper part of the blanket as well as through the flexible tubes into the theatre area, affecting the operating team and causing a certain degree of inconvenience. The energy suppliers can operate only one warming blanket at a time. Therefore, in most surgeries, either only the lower or the upper part of the body can be warmed by the system.

Intraoperative warming is needed during most operative procedures lasting longer than 30 minutes, and in all operations on children weighing less than 15 kilograms. The only situation where warming is practically not needed, are short procedures (less than 30 minutes), and when the temperature of the patient's body is intentionally lowered. Most patients begin losing body heat either prior to anesthesia or immediately upon the induction of anesthesia. Much body heat is lost within an hour of the start of anesthesia. Therefore, warming must begin either before or immediately following the induction of anesthesia.

One of the problems of intraoperative warming is associated with the requirements for servo-controlled delivery of heat, aimed at preventing overheating and allowing for the increased delivery of warmth to patients who are continuously losing body heat. Another problem is associated with the need for the circumferential warming of limbs, warming of discontinuous areas of the body and the possibility of warming sterile areas of the operative field. It is desirable to place a heating device on individual parts of the patient's body, so as to cover most of the body surface and to prevent the further loss of heat. Additionally, it is desirable to prevent the fan distribution of the warm air, and, while warming the desired parts of the patient's body, to prevent the warming of surgeons, nurses and anesthesiologists present at the time.

- 3 -

Comparing electrical heating to the above-described technique, the electrical heating has evident advantages, such as the possibility of the continuous control of heating, including computer control and automatic management.

U.S. Patent No. 4,532,410 discloses an electrical heating device for providing a feeling of warmth to the entire human body for comfort and protection in active outdoors pursuits in cold environments by means of conventional, convenient, practical and desirable materials such as a neck scarf. A heater is disposed in an appendage or bib attached to and made as an integral part of the neck scarf. The heater is composed of a heating element made of Nichrome sandwiched between two covering elements made of a heat diffusible material such as triacetate tape.

The use of electrical heating in operating rooms needs to guarantee the following three complex tasks:

1. It should guarantee electrical safety, namely, completely stave off the damage of the electrical voltage, especially taking into account that various solutions are in use during an operation, the presence of various metal instruments, the patient is undressed, as well as the possibility of hemorrhaging.
2. It should guarantee to avert the danger of burns that could be caused by the local overheating of heating elements.
3. It should guarantee the absence of the influence of the electromagnetic effects on electronic equipment involved in the operation or located in the vicinity of the heating device.

It is important to understand that in most cases, the above three tasks have to be accomplished together and completely. For example, to avoid the damage of electrical voltage, voltages as low as possible must be used. However, the use of low voltages with the required power compels the operation to take place with a high current, while this increase in current might affect the electronics located in the vicinity of the heating device.

To decrease the influence of the electromagnetic field of an electric power source onto the functioning electronics, it is known to utilize a bifilar arrangement

- 4 -

of conductors. This technique is disclosed for example, in the patent document DE29610436. However, this technique unavoidably leads to local heating, owing to the fact that the conductors in which heat required for heating an object (e.g., a patient's body) is dissipated, are located very close to each other.

## 5 SUMMARY OF THE INVENTION

There is a need in the art to facilitate the technique of electrical heating of an object, by providing a novel electrical heating unit and heating device and system utilizing the same.

The term "*object*" used herein signifies any subject as well as part of a  
10 human or animal body.

The present invention provides for electrical heating of an object with substantially homogeneous temperature field within the heating object. A heating unit according to the present invention can provide an as low as desired temperature gradient between the temperature of the heat-dissipating surface and  
15 the required temperature of the object, and can provide for compensating (reducing) a magnetic field created by the electrical heating unit in operation to be practically negligible, to meet the standard requirements and be even below the standard values.

A heating unit of the present invention comprises a heater element formed  
20 with internal or external heat distributor. A heating unit providing for compensating a magnetic field created by the electrical heating unit in operation can be fabricated from two elements, one made of a material with relatively high specific resistivity (e.g., stainless steel or transformer steel) and serving as a heater, and the other made from a material with relatively low specific resistivity (e.g. aluminum) serving as a  
25 heat-diffuser, thereby enabling using the elements in the form of short and wide strips, the fabrication method thereby being simple, with high accuracy of assembling. Such a heating unit is disclosed in WO 01/72249 assigned to the assignee of the present application.

- 5 -

However, it appears that for various applications, for example, heating a patient's body, e.g., in an operating room, the heating unit has to be as thin as possible, and flexible, and preferably also light.

According to one approach of the present invention, a thin and flexible  
5 heating unit satisfying the above conditions is obtained by making the heating unit from two functionally different adjacent elements electrically insulated from each other (e.g., each covered by a thin insulating layer, e.g., lacquer, or a laminating layer such as PVC, polypropylene, etc.) each being made from a metal foil with a low specific resistivity of about  $0.015\text{-}0.1\text{ Ohm}\cdot\text{mm}^2/\text{m}$ , such as aluminum, copper,  
10 etc., the two elements having different resistance and different surface areas. That element, which is to be located closer to the object to be heated, has a relatively larger surface area and a relatively lower resistance as compared to the other element and serves as a distributor of heat (external distributor) created by the other element. Similarly, if compensation of a magnetic field is required, the element  
15 with a relatively larger resistance is in the form of a strip folded in a serpentine- or ripple-like fashion such that the length of each of the two adjacent substantially parallel segments of the strip is significantly larger than the length of the connecting segment between them. In order to avoid local heating that could lead to burns, the surface of the heating unit through which heat is transferred to the object,  
20 i.e., the surface of the heat-distributor, should preferably be substantially equal to the surface area of the object to be heated. The operation of the heating unit thus provides for reducing the density of the heat flow that reaches the surface of the object to be heated and provides uniform heat transfer to the surface area to be heated.

25 According to another approach of the present invention, all the above conditions are achieved by making the heating unit from a heater element with internal heat distributor. Such a heater element is made of an electrically conductive material and is made with holes so as to provide a desired value of a working resistance of the heater element and thereby having a relatively reduced effective  
30 cross-section. This results in substantially homogeneous temperature field in the

- 6 -

vicinity of the heater element, when operated (an electric current passes through the heater element). If compensation of a magnetic field is required, the heater element with holes is in the form of a strip folded in a serpentine- or ripple-like fashion such that the length of each of the two adjacent substantially parallel segments of the strip is significantly larger than the length of the connecting segment between them.

Thus, according to one aspect of the present invention, there is provided an electrical heating unit for use in a heating device for heating an object to a required temperature and enabling to maintain this temperature of the object, the heating unit having one of the following configurations:

(i) comprises first and second elements each made of a material with a specific resistivity in a range of about  $0.01\text{-}0.1\text{Ohm}\cdot\text{mm}^2/\text{m}$  thereby enabling substantial flatness and flexibility of the heating unit, the first and second elements being accommodated adjacent to each other in spaced-apart substantially parallel planes, being electrically insulated from each other, and having different resistance and different surface areas as compared to each other, the first element having the relatively high resistance and relatively low surface area and serving as a heater, and the second element, which is to be located closer to the object when in operation of the heating unit, serving as a distributor of heat created by the first element when the first element is connected to a power source, the heating unit being arranged so as to provide for compensating a magnetic field created by the heating unit when connected to the power source;

(ii) comprises a heater element made of an electrically conductive material and formed with spaced-apart holes of predetermined shape and distribution within the heater element plane so as to provide a desired value of a working resistance of the heater element for generating a required heat power, the heating unit when connected to the power source thereby providing substantially homogeneous temperature field in the vicinity of the heating unit.

- 7 -

The different resistance of the two elements can be achieved by making them of different geometries (i.e., shape and dimensions) and/or making them from different materials. For example, both the heater and the heat-distributor elements may be made of the same material (e.g., aluminum), wherein the heater is a flat strip folded in a serpentine- or ripple-like fashion and the heat-distributor is of a flat sheet-like geometry. In this case, in order to provide compensation of the magnetic field when only the heater element is connected to the power source, the heater strip is folded such that the length of each of the two adjacent substantially parallel segments of the strip is significantly larger than the length of the connecting segment between them. In another example, the heat distributor element and the heater have a sheet-like geometry with the same perimeters, but the heater element is made with holes thereby having a relatively reduced effective cross-section. In this case, in order to reduce the magnetic field created by the heating unit to be practically negligible, the heat-distributor element is also connected to the power source such that the electric current in the two elements have the same magnitudes and opposite directions. The heater element and the heat-distributor element can be connected in series to the common power source. Generally, each of the two elements can be associated with its own power source. The power source may include an accumulator.

Thus, in one embodiment of the two-element heating unit of the invention, the heat-distributor element is a flat flexible sheet (e.g., of a substantially rectangular shape) and is to be disconnected from the power source ("passive" heat distributor). In this case, the heater element is a flat strip folded in a serpentine- or ripple-like fashion with the length of two adjacent segments of the strip being significantly larger than that of the connecting segment between them. According to another embodiment, the heat-distributor is also intended for connection to the power source ("active" heat distributor). In this case, the heat-distributor and the heater elements are shaped and connected to the power source such that the electric currents therein are of the same magnitudes and opposite directions, for example



- 8 -

the heater and heat-distributor elements have the same perimeters and the heater element is formed with holes.

The heating unit may include an additional external "passive" heat-distributor. This additional passive heat-distributor element is accommodated closer to the body to be heated, when the heating unit is in operation. For example, the "active" external heat-distributor may be enclosed between the "passive" heat-distributor and the heater element, or the heating unit has only the heater element made with holes (internal heat distributor) and the passive heat-distributor.

As defined by accepted standards with respect to the specific application of maintaining the core temperature of a patient's body under anesthesia, to completely avoid the damage of burns to a patient's body, the temperature on a heating unit itself, mainly on its external surface, should not exceed 41°C. At the same time, the surface temperature of the patient's body should not exceed 38°C. Accordingly, the heat flow from the heating element to the patient's body should be carried out with the maximum temperature gradient of 3°C. Taking into account that several layers of materials with very low heat conductivity (air, tissue, polyethylene) have to be accommodated between the heat dissipating element and the body, the exclusive complication of this problem is evident. The present invention solves this problem by providing the heat-distributor element and thereby reducing the temperature of the external surface of the heater element at 3-4°C, while maintaining the required core temperature of the patient's body.

According to yet another aspects of the present invention, there are provided a heating device comprising an electrical heating unit configured as described above and a power source for supplying a required voltage to the heating unit; and a heating system comprising the heating unit, power source and a control unit.

The heating unit of the present invention can operate with a substantially low voltage supply, e.g., several tens of voltage, e.g., 12V and less. The power source may comprise a step-down transformer interconnected between the power network and the heating device. The power supply source may comprise and an accumulator unit. The latter may for example include two or more batteries, which

- 9 -

are selectively operable by a switching unit, so as to connect a selective one of the batteries to the heating element. Batteries may and may not be of a rechargeable type. If rechargeable batteries are used, the construction may be such that, when one of the batteries is in operation, another battery in the unit may be charged with a charging unit.

The heating unit may be accommodated inside a bed-sheet for covering or wrapping the patient's body or body part to be heated, wherein such a cover or wrap may be made of any suitable material. The heating element may be formed of several separate parts for heating selective segments of the patient's body, such as legs, arms, torso, back or abdomen.

The control unit may comprise a temperature sensor for measuring the core or body temperature, a processing and managing unit, and an indication unit, and is operable to provide continuous feedback loop control of the temperature of the body and of the operation of the temperature sensor, and to provide indication thereof.

## BRIEF DESCRIPTION OF THE DRAWINGS

In order to understand the invention and to see how it may be carried out in practice, preferred embodiments will now be described, by way of non-limiting example only, with reference to the accompanying drawings, in which:

**Fig. 1** is a block diagram of a heating system utilizing a heating unit according to the invention;

**Figs. 2A to 2E** illustrate five examples, respectively, of the heating unit of the present invention suitable to be used in the system of Fig. 1; and

**Fig. 3** is a schematic illustration of main functional components of the system of Fig. 1.

## DETAILED DESCRIPTION OF A PREFERRED EMBODIMENT

Referring to **Fig. 1**, there is illustrated a heating system 10 comprising a heating device 12 that includes a heating unit 18 according to the invention

- 10 -

connectable to a power supply source 14; and a control unit 16. The construction of the control unit 16 does not form part of the present invention, and it may be of any known kind utilizing at least one temperature sensor, processors, contact and non-contact switches, etc. The power supply source 14 as a separate element is also  
5 known *per se* and therefore its construction and operation need not be specifically described, except to note that it operates to provide the normal operational mode of the heating unit 18 in accordance with instructions generated by the control unit 16.

Generally, the heating unit according to the invention is designed so as to generate the amount of heat required for heating an object (or part of an object) up  
10 to a desired temperature and to provide homogeneous temperature field within the heating object. To this end, the heating unit is designed so as to have an internal or external heat distributor.

In the present example of Fig. 1, the heating unit utilizes an external heat distributor. The heating unit 18 is thus composed of two elements 18A and 18B  
15 accommodated adjacent to each other in spaced-apart relationship, for example at a 1mm distance between them. The elements 18A and 18B are electrically insulated from each other, for example, by lamination of at least those surfaces of the elements by which they face each other by insulating layers such PVC, polypropylene, etc. The elements 18A and 18B have different surface areas and  
20 different resistance: the element 18A, that is to be connected to the power source when the device is in operation and is located farther away from the heated object, has relatively high resistance and relatively small surface area as compared to the element 18B, and serves as a heater element. The element 18B, that has relatively small resistance and relatively high surface area, is to be located closer to the object  
25 to be heated and may and may not be connected to the power source, and serves as a distributor of heat created by the heater element 18A to provide a substantially homogeneous temperature field within the heated object. Preferably, the surface area of the heat-distributor element 18B by which it faces the body is of about the size of the surface of the object to be heated, and is preferably no less than 2 times  
30 larger than the heat dissipating surface of the element 18A. The heat distributor

- 11 -

element **18B** thus provides a “one-side” heat transfer (distribution) of the heat created by the element **18A**.

The elements **18A** and **18B** are made from the same or different materials each with a specific resistivity in a range of about 0.01-0.1Ohm·mm<sup>2</sup>/m, e.g., aluminum, copper or iron foil. The heating unit **18** is thereby flat, flexible and light, and can be located inside a bed-sheet (of any suitable material) for covering the patient’s body or body part to be heated. Generally, the elements **18A** and **18B** are mounted with respect to each other so as to provide good thermal contact between them, namely such that there are substantially no heat losses within the contact area. When the heating unit **18** is put in operation, the element **18B** is located between the element **18A** and the object to be heated, and serves as a distributor of heat created by the heater element **18A**.

Reference is made to **Figs. 2A-2C** showing three different examples, respectively, of the implementation of the heating unit according to the invention. In heating units **118** and **218** of Fig. 2A and 2B, a “passive” heat distributor element is used (i.e., to be disconnected from the power source, when in the operation of the heating unit), while a heating unit **318** of Fig. 2C may utilize an “active” heat-distributor element.

The heating unit **118** (Fig. 2A) includes a heater element **118A** in the form of a zigzag-like strip made of iron foil ( $\rho=0.1\text{Ohm}\cdot\text{mm}^2/\text{m}$ ), and a heat-distributor element **18B** that is a rectangular sheet made of aluminum foil ( $\rho=0.027\text{Ohm}\cdot\text{mm}^2/\text{m}$ ) with the 350mmx320mmx0.018mm dimensions. The strip **118A** has a thickness  $\delta=0.05\text{mm}$ , width  $b=15\text{mm}$ , and a total length  $L=2.6\text{m}$ . In this specific example, the resistance of the strip **118A** is 0.3Ohm, and the 3V voltage supply thereto results in a current  $I=10\text{A}$  through the element **118A** and heat power  $P=30\text{W}$ . The strip **118A** is arranged such that it defines several pairs of spaced-apart parallel segments, generally at  $S$ , each of a length  $l=230\text{mm}$ , wherein each two adjacent segments  $S$  are connected by a segment  $S_0$  of the strip of a length  $l_0=25\text{mm}$  (the ratio  $l/l_0$  being 9.2). In other words, the strip is folded such that the length  $l$  of each of the spaced-apart substantially parallel segments  $S$  is substantially

- 12 -

larger than the length  $l_0$  of the strip segment  $S_0$  between each two adjacent parallel segments. Hence, the arrangement of the strip **118A** results in that electric currents flowing in the two adjacent segments  $S$  have equal magnitudes and opposite directions, and the fact that  $l \gg l_0$ , results in the negligible (substantially zero) magnetic field in the vicinity of the heating unit **118**.

The heating unit **218** of Fig. 2B comprises a sheet-like heat-distributor element **218B** made of aluminum foil of a thickness of 0.018mm, and a serpentine-like strip **218A** made of aluminum foil having a width  $b=10\text{mm}$ , thickness  $\delta=0.018\text{mm}$ , the total length  $L=9.77\text{m}$  and resistance  $R=1.4\Omega$ . The strip **218A** is folded such that it defines a plurality of spaced-apart parallel identical segments  $S_1$  (each of a length  $l_1=580\text{mm}$ ) and a plurality of spaced-apart parallel identical segments  $S_2$  (each of a length  $l_2=560\text{mm}$ ), with a space between the adjacent segments  $S_1$  and  $S_2$  being  $a_1=10\text{mm}$  and a space between the two adjacent segments  $S_2$  being  $a_2=23\text{mm}$ . Thus, the elements **218A** and **218B** made of the same material have different geometries resulting in different resistance values, and the arrangement of the strip **218A** provides for compensating the magnetic field created by the electric current passage therethrough. By supplying 5,1V to the heater element, a current  $I=3.5\text{A}$  through the heater element and heat power  $P=18\text{W}$  are obtained.

Preferably, the dimensions of the heater element (e.g., strip) satisfy the following relationships:

$$l \geq k \cdot U_{\text{heat}} \cdot \sqrt{\frac{\delta}{\rho}} \qquad b \geq k \cdot I \cdot \sqrt{\frac{\rho}{\delta}}$$

Here,  $U_{\text{heat}}$  is the voltage that falls on the heater element;  $I$  is the current flowing therethrough;  $\rho$  is the specific resistivity of the heater element material;  $\delta$  is the thickness of the heater element;  $k$  is a coefficient depending on the object to be heated and the required temperature, selected so as to satisfy the condition that electric power supplied to the heater element (heat power) is substantially equal to

- 13 -

power needed for heating a specific object to a required temperature. This approach for designing a heating element, aimed at providing an as low as desired temperature gradient between the temperature of the heat dissipating surface of the heating element and the required temperature of the object, has been developed by the inventor of the present application and is disclosed in U.S. Patent No. 6,483,990. The main idea of this technique consists of considering the relationship between the physical parameters (i.e., length, width, thickness and specific resistivity) of the heating element, and its electrical parameters (i.e., voltage and current). The physical parameters are dictated by the heating power  $W$  required for heating a specific object to a desired temperature, i.e.,  $W=kS$ , where  $S$  is the area of the outer surface of the heating element through which the heating power  $W$  is dissipated (i.e., product of the length  $l$  and width  $b$  of the outer surface), and  $k$  is the coefficient depending on the object to be heated and the desired temperature. The electrical parameters are dictated by electric power,  $W'=UI$ , supplied to the heating strip, wherein  $U$  is the electric potential and  $I$  is the electric current passing through the heating element, which depends on the specific resistivity  $\rho$  of the selected heating element material. To facilitate the understanding of this idea, let us assume that the temperature gradient needs to be reduced. For this purpose, the value of  $k$  is appropriately increased, which automatically causes the surface area  $S$  of the heating element to be increased. This, in turn, means that lower voltages should be supplied to the heating element, and this factor is used in selecting the electric conductive material with an appropriate specific resistivity.

In the example of Fig. 2C, the heating unit **318** is composed of heater and heat-distributor elements **318A** and **318B** made of the same material, e.g., aluminum, in the form of flexible sheets of equal perimeters. Here, however, the heater element **318B** is formed with holes **H** (four spaced-apart arrays of holes in the present example) having the length of 10mm and the width of 6mm, defining aluminum segments  $S_1$  and  $S_2$  of dimensions  $b_1=3\text{mm}$  and  $b_2=6\text{mm}$ , respectively. The segments  $S_1$  thus create the required resistance for the element **118A** while the segments  $S_2$  provides for better heat distribution (the so-called "internal heat

- 14 -

distributors"). The heater element **318B** thus has a relatively reduced effective cross-section defined by the width of the segments  $S_1$  between the holes. When the heat-distributor element is also connected to the power source, the electric currents in the two elements have the same magnitude and opposite directions. This can be obtained by connecting the heater element and the heat-distributor element in series to the common power source and placing one on top of the other.

The provision of holes is associated with the following. Heat created by the heater element should be transferred to the heat-distributor element, which should distribute this heat within its entire surface so as to achieve a homogeneous temperature field within the heated surface. Since the distributor should preferably be very thin (to make the device flexible), it would be difficult to transfer heat to high distances even when using aluminum or copper as a heat-distributor material (high heat conductivity material). For example, at a maximal thickness 0.014-0.018mm of the heat-distributor, heat can be effectively transferred ("effectively" meaning so as to maintain the homogeneity of the temperature field within the heated surface) to a distance of up to 4cm. Therefore, the distance between the projection of the active element that dissipates heat (heater element) onto the passive element that distributes this heat (heat-distributor element) and any other location on the heat-distributor where the homogeneous temperature field is to be maintained, should be up to 3-4cm (preferably 2-3cm). Hence, in order to provide the minimum of this distance when both the heater and the heat-distributor elements are sheets of substantially the same perimeter, the heater element is made with a plurality of holes such that the effective cross-section of the heater element provides the required resistance of the heater element to meet the requirements of power to be supplied to the heater element. By this, the entire surface of the heat-distributor is "filled" by the heat-element material, i.e., the maximal distance between the effective segments of the heater and distributor is reduced to the order of the hole's dimension (about 3-4mm). Thus, generally speaking, the provision of holes is to provide alternation of heat dissipating segments (segments of lower surface area) with heat distributing segments (segments of higher surface area). A

- 15 -

heating element with holes thus presents connected in series elements of high resistance (narrow segments) and elements of low resistance (wide segments), the narrow elements providing heat generation and wide segments providing the distribution of this heat, thereby sometimes eliminating the need for external heat  
5 diffuser.

It should be noted although not specifically shown that both the heater element and the heat-distributor element may be strips, e.g., folded in a ripple-like fashion, provided the heat-distributor element has a larger surface area than the heater element. Additionally, the heating unit may be composed of a heater element,  
10 an "active" heat-distributor (connected to the power source), and an additional "passive" heat-distributor element (disconnected from the power source) that is to be located closer to the object to be heated.

It should be noted that since the electric heating does not utilize liquid transfer or gaseous transfer at all, it is a simple task to divide the entire heating unit  
15 into several parts of equal dimensions and equal power, taking into account that the same power is required for heating both arms of a patient and his leg, in accordance with their dimensions. Therefore, each part of the heating unit may form a heater device with the power of 12W, 6W being needed for each patient's arm.

Experiments of heating elements-with-holes made of various materials, such  
20 as aluminum, copper, iron-based alloys, utilizing the holes of various geometries (circular, rectangular, elliptical), have shown the following main advantages of these heating elements:

(1) The use of these heating elements enables to significantly reduce the heating element length. This is important when creating a heating unit of limited  
25 dimensions at a fixed power to meet the requirements of a specific application.

(2) The use of heating elements with holes enables to obtain homogeneous temperature field without the use of a heat diffuser (heat distributor) as a separate element (external heat diffuser). If compensation of an electromagnetic field is also required, the heating element with holes can be a strip arranged as described above



- 16 -

so as to provide for compensating the magnetic field created by the electric current passage therethrough.

**Figs. 2D and 2E** exemplify heating units **418** and **518** each utilizing a heater element formed with holes **H** (with no heat distributor element as a separate element). These heater elements may be made of any electrically conductive material, such as transformer steel, stainless steel, aluminum foil, copper, etc. The holes are arranged such that an array of holes extends along the electric current passage through the heater element, defined by the application of voltage to the heater element.

The heating unit **418** comprises the heater element **420**, e.g., made of aluminum and designed similar to the element **318B** of Fig. 2C, namely, including four spaced-apart arrays of holes **H** having the length of 10mm and the width of 6mm, defining aluminum segments **S<sub>1</sub>** and **S<sub>2</sub>** of dimensions  $b_1=3\text{mm}$  and  $b_2=6\text{mm}$ , respectively. The segments **S<sub>1</sub>** thus create the required resistance for the element **318B** while the segments **S<sub>2</sub>** provide for better heat distribution ("internal heat distributors"). The heater element **318B** thus has a relatively reduced effective cross-section defined by the width of the segments **S<sub>1</sub>** between the holes.

The heating unit **518** comprises the heater element **520** in the form of a zigzag-like strip (similar to that of Figs. 2B or 2C). The strip **520** is folded such that it defines several pairs of spaced-apart parallel segments, generally at **G**, of a certain length  $l$ , wherein each two adjacent segments **G** are connected by a segment **G<sub>0</sub>** of the strip of a length  $l_0$  significantly smaller than the length  $l$  (e.g.,  $l=230\text{mm}$  and  $l_0=25\text{mm}$ , the ratio  $l/l_0$  being 9.2). In other words, the strip is folded such that the length  $l$  of each of the spaced-apart substantially parallel segments **G** is substantially larger than the length  $l_0$  of the strip segment **G<sub>0</sub>** between each two adjacent parallel segments **G**. Hence, the arrangement of the strip **520** results in that electric currents flowing in the two adjacent segments **G** have equal magnitudes and opposite directions, and the fact that  $l \gg l_0$ , results in the practically negligible (substantially zero) magnetic field in the vicinity of the heating unit **518**. Additionally, each of the segments **G** (or the entire strip **520**) is formed with holes,

- 17 -

for example similar to that of the heater element 420 of Fig. 2D. Thus, heater element segments defining the holes serve for creating the required resistance for the element 520 and providing better heat distribution ("internal heat distributors"), while the arrangement of the strip 520 provides for compensating the magnetic field created by the electric current passage therethrough.

Generally, the shape of holes in the heater element depends solely on the requirement to the heater element size (e.g., its length): the smaller the dimension  $b_1$  of the segment  $S_1$ , the shorter the heater element needed for dissipating a predetermined power. The smaller part of the heater element material through which the electric current flows (the narrow segments) dissipates heat (due to higher resistance), while the other part (wider segments) distributes this heat. Hence, the segments  $S_1$  define the required power created by the heater element, while segments  $S_2$  define the heat diffusion. Direct contact between the segments  $S_1$  and  $S_2$  results in diffusion of heat dissipated by the segments  $S_1$ . The use of heater elements with holes without any external heat distributor enables to create super-thin (about 0.2mm and less) and precise heater elements with the temperature gradient within the heater element of about 0.5°C and less.

The present invention can advantageously be used to prevent and treat hypothermia and provide warmth to cold or shivering patients. In addition, the invention can be used whenever conditions exist that could cause patients to become cold/hypothermic. The invention can be used in operating rooms, recovery rooms, intensive care units, labor and delivery, emergency rooms, ships, aircrafts, long term care facilities, home health-care and other areas where a patient needs to be warmed by medical professionals. The invention can be used for heating surfaces of any size and body kind, in both humans and animals. In one specific, but non-limiting example, the present invention is used for heating a part of the patient's body up to 38° (the skin temperature). Power supplied to the heater element is 18W. The heater element has the heat dissipating surface area of 40x60cm<sup>2</sup>. The working temperature of the heater element is 39°, thus providing a

- 18 -

1° temperature gradient between the working temperature of the heat dissipating surface and the required temperature of the heated body part.

As indicated above, a power supply source suitable to be used in the present invention may be of any known kind, and is selected in order to supply a required voltage to the heating unit and to meet the requirements of a specific application. The following is the description of one specific, but not-limiting example of the power supply source suitable to be used in the device of the present invention.

In one specific but non-limiting example, the power supply source comprises an accumulator unit including two batteries, each selectively chargeable by a standard charging unit including a step-down transformer. Preferably, the power supply source activates the control unit and the heating unit and includes the first and second power supply units. For example, the first power supply provides a 6V voltage to the heating unit and the second power supply provides a 24V to the control unit. Additionally, each power supply charges two 6V batteries that activate the control unit and the heating unit when power out should occur. Each of the power supply units is adjusted to power that is required to recharge the batteries. The 6V power supply is adjusted to 7V DC and the 24V supply is adjusted to 27V DC. Since the power required for the heating unit is lower than the supplied power, a serial diode can be used that decreases the supplied power to the desired value. The power supply units may operate in a phase control manner. This technique is based on the principle of a component that operates as a switch. In this case, a SCR connected to the outlet of the entrance transformer reduces the power. The SCR is connected to a low AC power controlled by a control electronic card, which commands the SCR to start operation in a certain ignition angle dictating the outlet power. In case of low input power or over loading of the power supply, the control card commands the SCR to enlarge the ignition angle and by this, it corrects the power and returns the power to its original nominal value. Each power supply incorporates an internal shunt, which measures the current to protect the power supply against short-circuits or over loading. The shunt also performs current limitation.

- 19 -

The use of an accumulator as a power supply source eliminates the creation of an electromagnetic field, due to the absence of the alternating current component. The accumulator provides direct voltage output in which the alternating component is absent, which results in the absence of electric current oscillations, and thereby the absence of the electromagnetic field. As for a magnetic field created by the electric current passing through the heater element, it can be reduced as described above.

Reference is made to **Fig. 3**, exemplifying the functional elements of the system **10** of Fig. 1. In this specific but non-limiting example, the power supply source **14** utilizes an accumulator unit **20** including two batteries **B<sub>1</sub>** and **B<sub>2</sub>**, each selectively chargeable by a standard charging unit **22** typically including a step-down transformer (not shown). It should, however, be understood that a power supply source of any other suitable kind can be used. The charging unit **22** is interconnected between a power network and an analyzing unit **24**, which operates to switch between the batteries **B<sub>1</sub>** and **B<sub>2</sub>**, so as to selectively connect one of them (which is charged) to the heating unit **18** (at least the heater element thereof). A connecting unit **26** operates to connect/disconnect the heating unit **18** to the accumulator unit **20**. A processing and managing unit **28** is provided, being interconnected between the heating unit **18** and the connecting unit **26**, and being connected to an indication unit **30**.

The processing and managing unit **28** performs the following functions: it controls the operation of appropriately provided one or more temperature sensors (not shown) that generate data indicative of the current core temperature of the patient's body; analyzes the current temperature of the patient's body; controls the operations of the switching and connecting units **24** and **26**. The indication unit **30** provides indication of the operational state of the other units, and the temperature of the patient's body.

When designing the above circuit, the following important operational requirements are considered: complete electrical safety for both the patient and medical personnel; continuous control of the temperature level of the patient's

- 20 -

body; control of breaking of the temperature sensor circuit associated with means involved in the anesthesia process and with the external temperature sensors; continuous control of the extent of discharging of the battery with the possibility of switching to a reserve battery; reduction as much as possible in the signal-noise  
5 level with respect to other electronic equipment.

When putting the system of the present invention into operation, an indication that the system is connected to a power network is provided by any suitable means, for example, a lamp. Other suitable indicators, e.g., lamps, provide an indication that the fuses of the primary coil of the step-down transformer are in  
10 good condition. The voltage of 220V is supplied to the transformer, and the lowered alternating voltage of about 7V is provided on the secondary coil of the transformer. Alternating voltage is supplied from the secondary coil onto a diode bridge, and then onto a voltage stabilizer. As a result, an output DC voltage of about 6V is provided at the output of the charging unit 22. This voltage output is  
15 aimed at recharging the batteries, either battery  $B_1$  or  $B_2$ , depending on the extent of the battery discharge.

As to which battery should be put in operation and which one should be recharged, this is determined by the analyzing scheme in the analyzing unit 24. During the analyzing procedure, the unit 24 generates a signal indicative of the  
20 switching procedure, in response to which a transistor (not shown) in the processing and managing unit 28 is closed, which means that the current flow in the heating strip is halted, and an electrical circuit between the units 24 and 26 is disconnected. This is implemented by mechanical means, such as relay contacts. This having been done, that battery which is more discharged among the two, is  
25 connected to the charging unit 22 by switches (relay contacts), while the other battery is connected to the circuit line operating for heating. After the completeness of the process of switching between the batteries, control signals are sequentially generated in the processing and managing unit 28, so as to put the heating device into operation, namely, the relay contacts are closed and the transistor in the unit 28  
30 is completely opened. Then, the unit 28 is completely put in operation.

– 21 –

As indicated above, the presence of the temperature sensors is considered. The processing and managing unit 28 continuously controls the magnitude of the temperature and controls the situation of accidentally breaking the temperature sensors. Concurrently with this control, the indication unit 30 provides information  
5 about the temperature value exposed to an authorized person.

Following are several processes that may occur during the operation in an operating room:

1. The temperature of the patient's body exceeds the given value. In this case, a corresponding signal is generated in the processing and managing unit 28,  
10 so as to lock the transistor. Accordingly, the relay contacts are disconnected. The indication unit 30 provides a signal indicative of the fact that the heating process is halted. The unit 28 continues to control the decrease in the temperature of the patient's body, and upon detecting that the temperature is less than the defined threshold, generates corresponding signals so as to switch on the heating process  
15 (the relay contacts are closed and the transistor is opened). The indication unit 30 provides indication to the fact that the heating is turned on.

2. The temperature of the patient's body does not reach the given value, and an indication signal indicative of switching between the batteries is generated by the unit 30. In this case, the processing and managing unit 28 generates a  
20 sequence of signals aimed at disconnecting the heating unit 18 from the battery, and operates the analyzing unit 24 for switching between the batteries. The units 24 and 28 operate together so as to allow the switching process. After switching to the correct battery, the heating unit is supplied with the required voltage so as to perform the heating process.

25 In the specific example, the electrical conditions are as follows:

Electric voltage of about 220V is supplied to the accumulator unit 22 through screened wires with doubled electrical insulation. The fuses are mounted in two phases of the primary network of the transformer. Human access to the fuses without the use of a special tool is completely avoided. The transformer is of a  
30 down step torroidal kind, and the strengthened double insulation is provided

- 22 -

between its primary and secondary windings and between the primary winding of the magnetic core. There is no such moment in time when the heating unit is in its operating position during the switching between the batteries. In other words, when the processing and managing unit 28 operates to provide switching between the batteries, the heating unit 18 is previously disconnected and maintained in this position during the entire re-switching process, i.e., the heating unit is mechanically (and electrically) disconnected from the accumulator unit 20 and from the charging unit 22. Thus, only one, charged battery is always electrically connected to the heating unit, while being at that time disconnected from the charging unit 22 (i.e., from the power network).

It should be noted that the present invention can generally be used with a power source of any suitable kind, and is not limited to the above examples.

Thus, the present invention provides a thin and flexible (possibly flat) heating unit that enables an as low as desired temperature gradient between the temperature of the surface of the heat dissipating surface in the heating unit and that of an object to be heated, and reduction of a magnetic field created by the heating unit when in operation. The provision of the heat-distributor element enables to provide the uniform distribution of heat flow directed towards the object to be heated (homogeneous temperature field within the heated body surface), and to reduce the heat flow reaching the body.

Those skilled in the art will readily appreciate that various modifications and changes can be applied to the preferred embodiment of the invention as hereinbefore exemplified without departing from its scope defined in and by the appended claims.

**CLAIMS:**

1. An electrical heating unit for use in a heating device for heating an object to a required temperature and enabling to maintain this temperature of the object, the heating unit having one of the following configurations:

5 (i) comprises first and second elements each made of a material with a specific resistivity in a range of about  $0.01-0.1 \text{ Ohm} \cdot \text{mm}^2/\text{m}$  thereby enabling substantial flexibility of the heating unit, the first and second elements being accommodated adjacent to each other in spaced-apart substantially parallel planes, being electrically insulated from each other, and having different  
10 resistance and different surface areas as compared to each other, the first element having the relatively high resistance and relatively low surface area and serving as a heater, and the second element, which is to be located closer to the object when in operation of the heating unit, serving as a distributor of heat created by the first element when the first element is  
15 connected to a power source, the heating unit being arranged so as to provide for compensating a magnetic field created by the heating unit when connected to the power source;

(ii) comprises a heater element made of an electrically conductive material and formed with spaced-apart holes of predetermined shape and distribution  
20 within the heater element plane so as to provide a desired value of a working resistance of the heater element for generating a required heat power, the heating unit when connected to the power source thereby providing substantially homogeneous temperature field in the vicinity of the heating unit.

25 2. The heating unit according to Claim 1, when in operation provides for as low as desired temperature gradient between the temperature of the surface through which heat is dissipated and said required temperature of the heated object.



– 24 –

3. The heating unit according to Claim 2, when in operation provides for the temperature gradient between the temperature of the surface through which heat is dissipated and said required temperature of the heated object as low as 1°.

4. The heating unit according to any one of Claims 1(i) to 3, wherein the  
5 surface area of the second element is at least two times higher than the surface area of the first element.

5. The heating unit according to any one of Claims 1(i) to 4, wherein the external surface area of the second element is substantially equal to the surface of the object to be heated.

10 6. The heating unit according to any one of Claims 1(i) to 5, wherein the first and second elements are made of the same material.

7. The heating unit according to any one of Claims 1(i) to 5, wherein the first and second elements are made of different materials.

8. The heating unit according to any one of preceding Claims, wherein the  
15 heater element is made of one of the following materials: aluminum, copper, and iron.

9. The heating unit according to any one of Claims 1(i) to 8, wherein the second element is made of aluminum or copper.

10. The heating unit according to any one of preceding Claims, wherein the  
20 arrangement of the heating unit providing for compensating the magnetic field is such that the heater element is a strip folded in a ripple-like fashion and having a length of each of two adjacent substantially parallel segments of the strip significantly larger than a length of a connecting segment between them.

11. The heating unit according to Claim 1(i) and 10, wherein the second  
25 element which is to be disconnected from the power source during the operation of the heating unit has a sheet-like geometry.

12. The heating unit according to Claim 1(i) and 10, wherein the second  
element is a strip folded in a ripple-like fashion and having a length of each of two adjacent substantially parallel segments of the strip significantly larger than a  
30 length of a connecting segment between them.

13. The heating unit according to any one of Claims 1(i) to 9, wherein the first and second elements have sheet-like geometries of substantially equal perimeters, and the first element is formed with a plurality of holes.

14. The heating unit according to Claim 1(i), wherein the first and second  
5 elements, when both connected to the power source, are characterized by electric currents of the same magnitude and opposite directions, thereby resulting in the compensation of magnetic fields created by the electric currents passage through the elements.

15. The heating unit according to any one of preceding Claims, wherein the  
10 length,  $l$ , and width,  $b$ , of the heater element satisfy the following relationships:

$$l \geq k \cdot U \cdot \sqrt{\frac{\delta}{\rho}} \qquad b \geq k \cdot I \cdot \sqrt{\frac{\rho}{\delta}}$$

wherein  $U$  is the voltage that falls on the heater element;  $I$  is the current flowing through the first element;  $\rho$  is the specific resistivity of the heater element material;  $\delta$  is the thickness of the heater element;  $k$  is a coefficient depending on the object to  
15 be heated and said required temperature, so as to satisfy the condition that electric power supplied to the heating unit is substantially equal with a heat power required for heating the object to the required temperature.

16. The heating unit according to any one of Claims 1(i) to 15, wherein at least those surfaces of the first and second elements by which they face each other are  
20 coated with thin insulating layers.

17. The heating unit according to Claim 1(ii), wherein said heater element is in the form of a strip folded in a serpentine- or ripple-like fashion such that a length of each of the two adjacent substantially parallel segments of the strip is significantly larger than the length of the connecting segment between them, the heating unit  
25 when in operation thereby providing for compensating of a magnetic field created due to the electric current passage through the heater element.

– 26 –

18. The heating unit according to Claim 17, comprising a heat distributor element located adjacent to said heater element.

19. The heating unit according to Claim 18, wherein said heat distributor is made of a material with relatively low value of working resistance as compared to  
5 that of the heater element.

20. A heating device for heating an object to enable maintaining a required temperature of the object with as small as desired temperature gradient between the surface through which heat is dissipated and said required temperature of the object, the heating device comprising the heating unit of any one of preceding  
10 Claims, and a power source for supplying a required voltage to the heating unit.

21. The device according to Claim 20, wherein said required voltage is lower than that of a power network.

22. The device according to Claim 21, wherein said power source comprises an accumulator unit.

15 23. The device according to Claim 22, wherein said accumulator unit comprises at least two batteries, selectively operable by a switching unit, so as to connect a selective one of the batteries to the heating unit.

24. The device according to Claim 23, wherein a charging unit is provided and selectively operable to charge that one of the batteries which is disconnected from  
20 the heating unit.

25. The device according to Claim 24, wherein said selected one of the batteries, while being connected to the heating unit, is mechanically and electrically disconnected from a power network.

26. The device according to any one of Claims 20 to 25, wherein said heating  
25 unit is configured to be accommodated inside a bed-sheet for covering or wrapping the body to be heated.

27. A heating system for heating an object up to a required temperature and maintaining this temperature, the system comprising the heating device of any one of Claims 20 to 26, and a control unit.

- 27 -

28. The system according to Claim 27, wherein said control unit comprises a temperature sensor for measuring the temperature of the object, a processing and managing unit, and an indication unit, and is operable to provide continuous feedback loop control of the temperature of the object and of the operation of the
- 5 temperature sensor, and to provide indication thereof

1/4

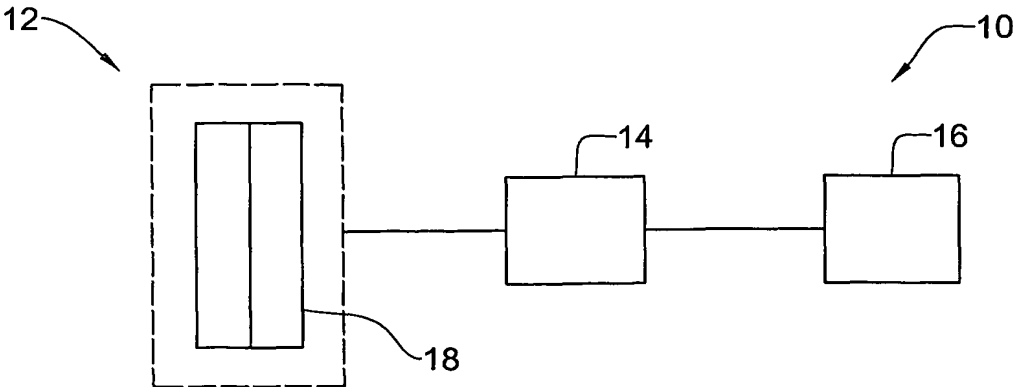


FIG. 1

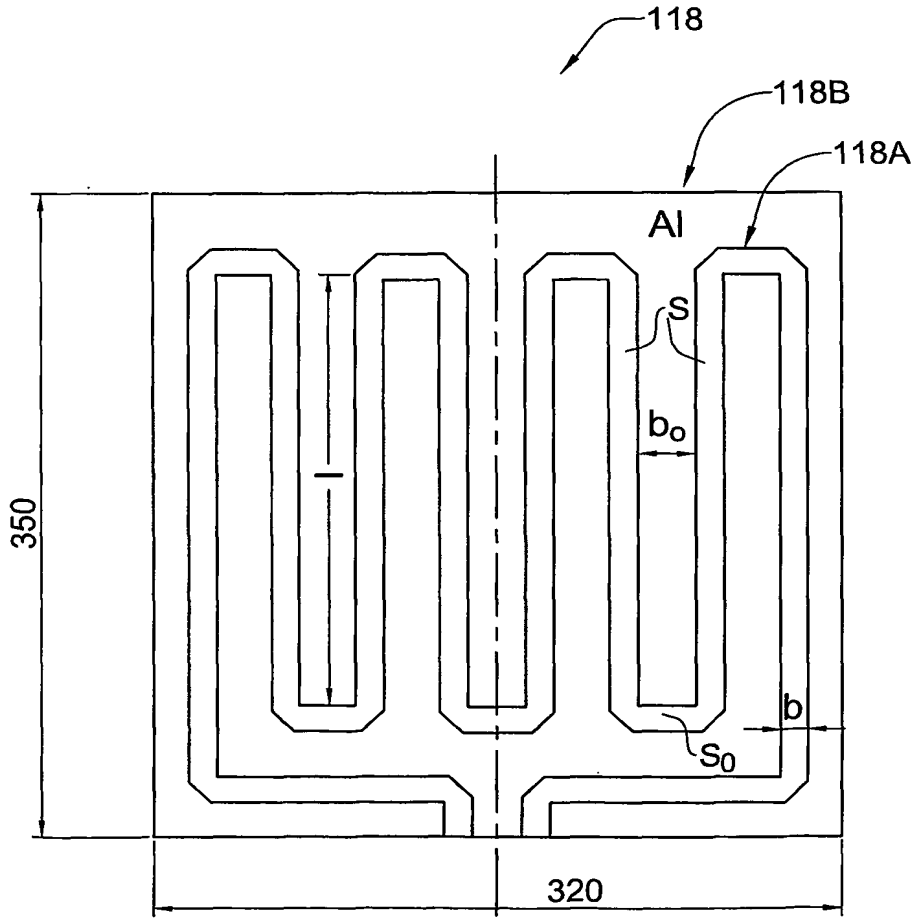


FIG. 2A

2/4

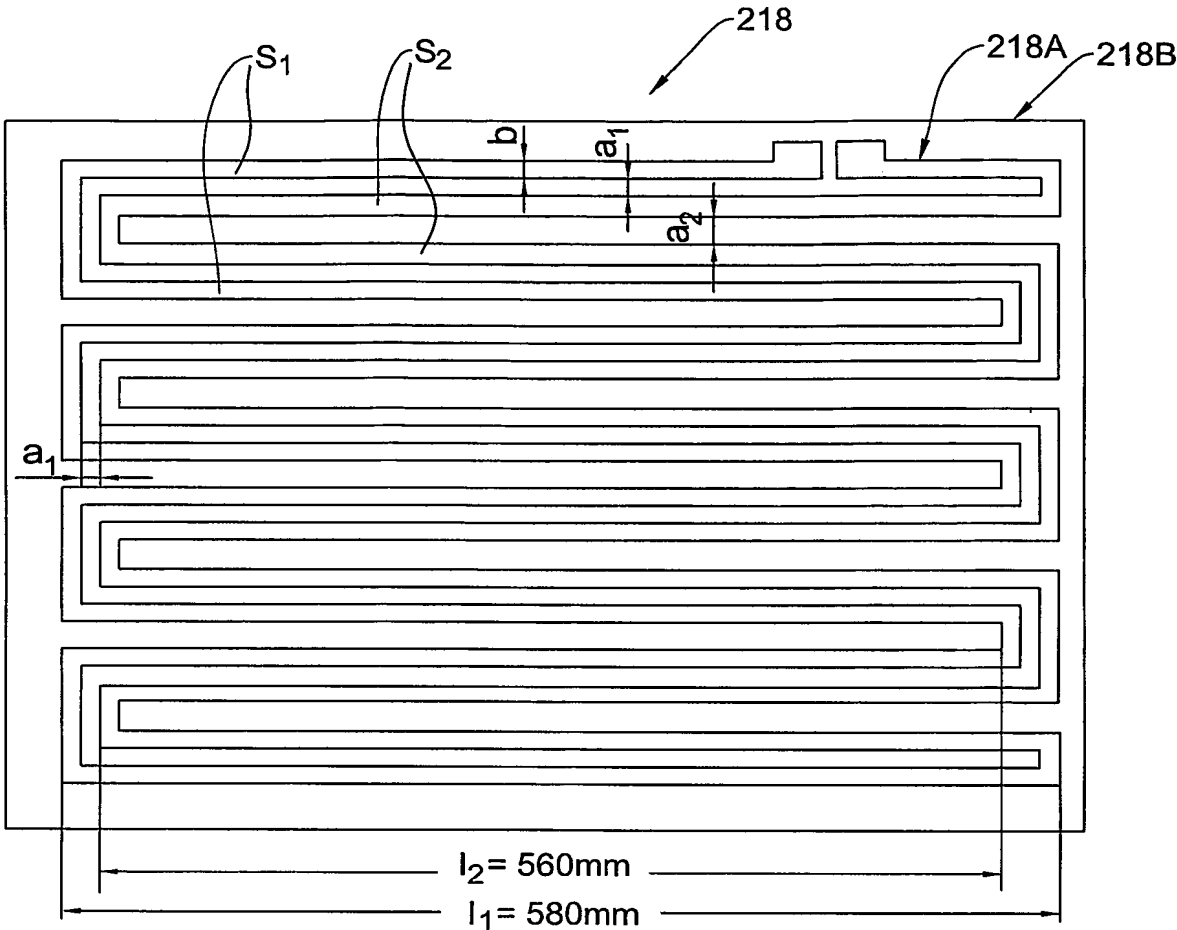


FIG. 2B

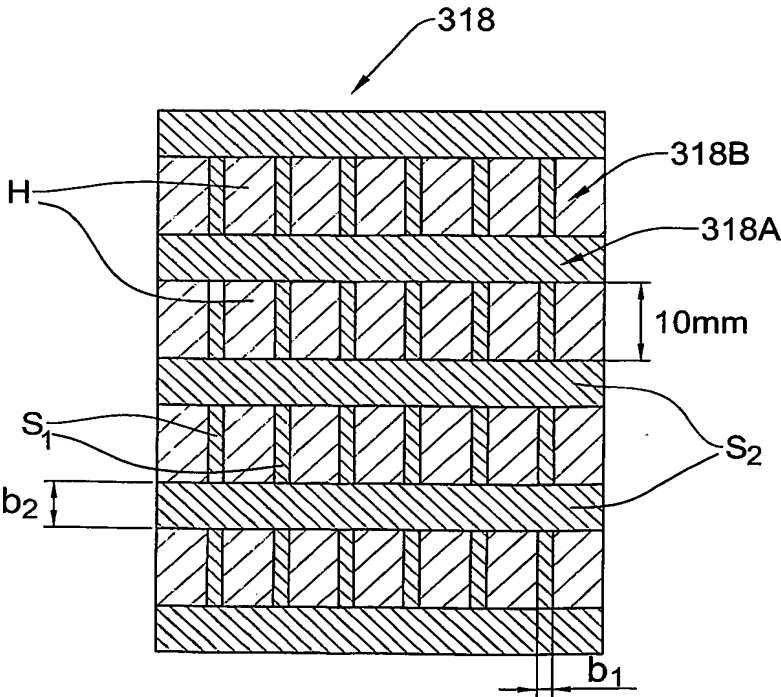


FIG. 2C

3/4

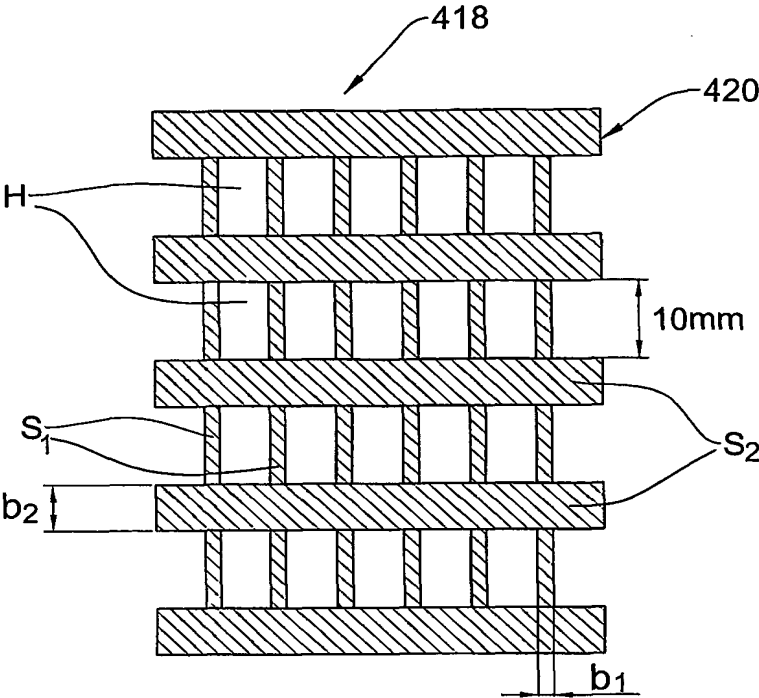


FIG. 2D

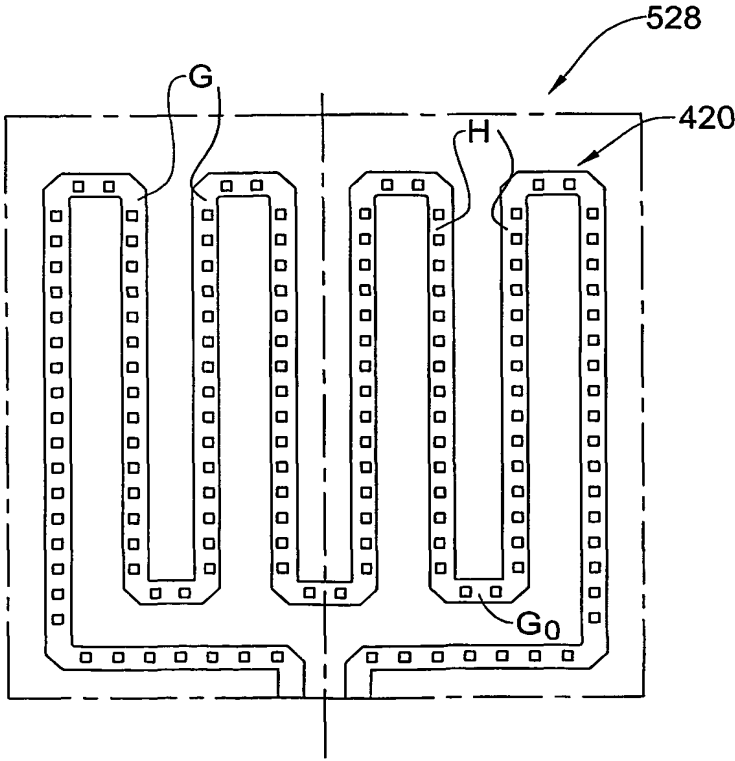


FIG. 2E

4/4

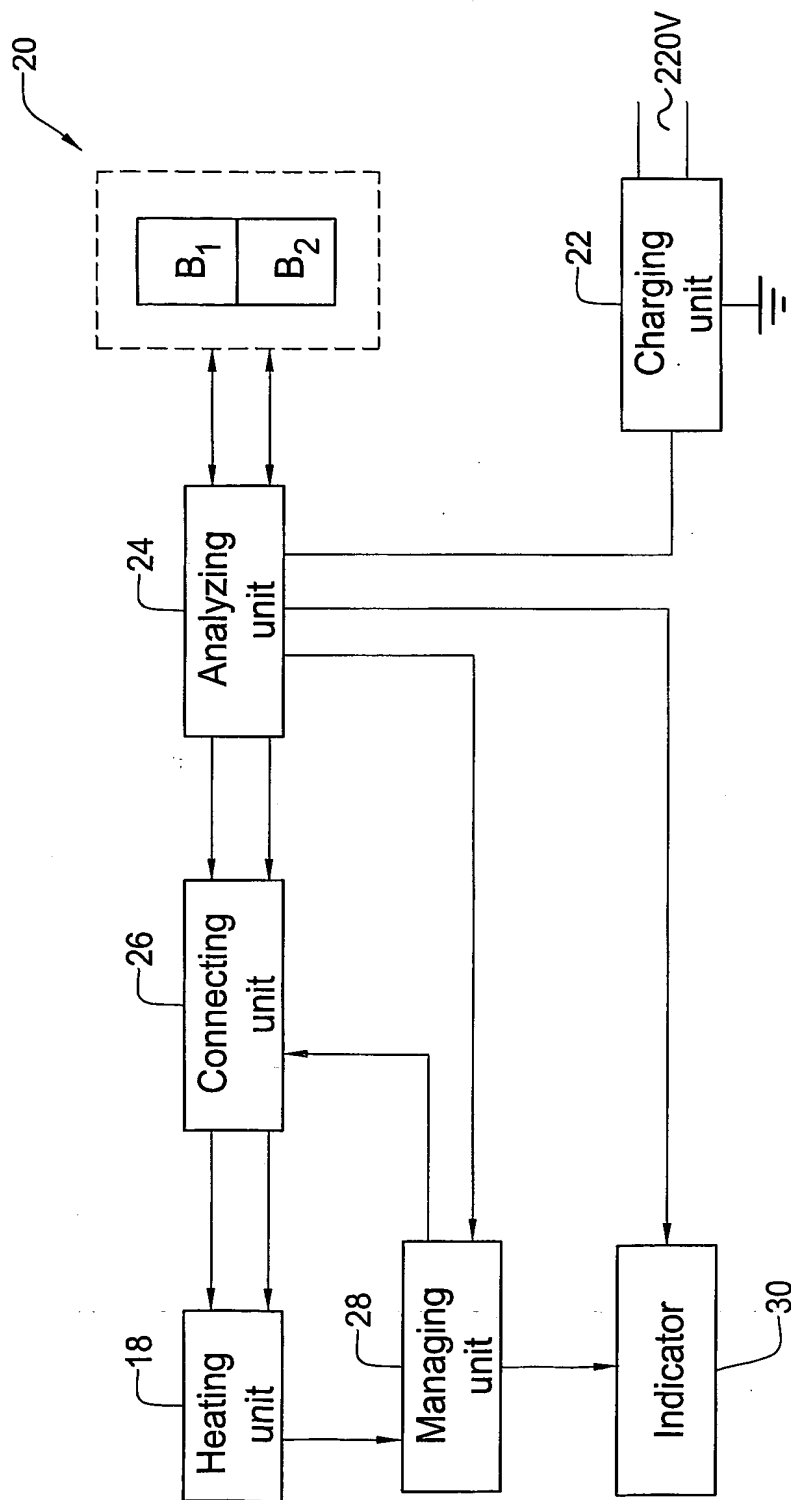


FIG. 3



# INTERNATIONAL SEARCH REPORT

International Application No

PCT/IL 03/00520

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 H05B3/34

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H05B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	<p>WO 01 72249 A (BIKOVSKY DAVID ;HTTP HYPOTHERMIA THERAPY LTD (IL)) 4 October 2001 (2001-10-04) abstract page 1, line 1-5 page 4, line 24 -page 5, line 15 page 6, line 16 -page 8, line 5 page 8, line 27 -page 9, line 16 page 12, line 16 -page 14, line 19 page 15, line 14-19 page 16, line 9 -page 17, line 2 claims 1,3,5-20,23-31 figure 3</p> <p style="text-align: center;">--- -/--</p>	<p>1-5, 7-10,12, 14-28</p>

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

\* Special categories of cited documents :

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

\*&\* document member of the same patent family

Date of the actual completion of the international search

29 October 2003

Date of mailing of the international search report

05/11/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3018

Authorized officer

D/L TASSA LAFOR., J

## INTERNATIONAL SEARCH REPORT

Internat Application No

PCT/IL 03/00520

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 97 09866 A (BIKHOVSKY DAVID ;BAR KESER PROJECT MANAGEMENT I (IL)) 13 March 1997 (1997-03-13) abstract figure 9A claim 1	1, 15
X	WO 01 23659 A (HUH JEUNG SOO ;PARK DONG WON (KR); BAEK WOON YI (KR); KIM JIN DO ( ) 5 April 2001 (2001-04-05)	1
A	abstract page 1, line 5-11 claim 1 figure 4	13
A	DE 296 10 436 U (KOENIG ROLAND) 7 November 1996 (1996-11-07) the whole document	1, 14

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/IL 03/00520

Patent document cited in search report		Publication date		Patent family member(s)		Publication date
WO 0172249	A	04-10-2001	GB	2360922 A		03-10-2001
			AU	4678301 A		08-10-2001
			EP	1272136 A1		08-01-2003
			WO	0172249 A1		04-10-2001
WO 9709866	A	13-03-1997	AU	6836496 A		27-03-1997
			CA	2231179 A1		13-03-1997
			EP	0850548 A1		01-07-1998
			WO	9709866 A1		13-03-1997
			US	2003016954 A1		23-01-2003
			US	6483990 B1		19-11-2002
WO 0123659	A	05-04-2001	KR	2001029238 A		06-04-2001
			AU	7688200 A		30-04-2001
			JP	2003510144 T		18-03-2003
			WO	0123659 A1		05-04-2001
			KR	2002071447 A		12-09-2002
DE 29610436	U	07-11-1996	DE	29610436 U1		07-11-1996